


TWT/TWF-S/TWF-N

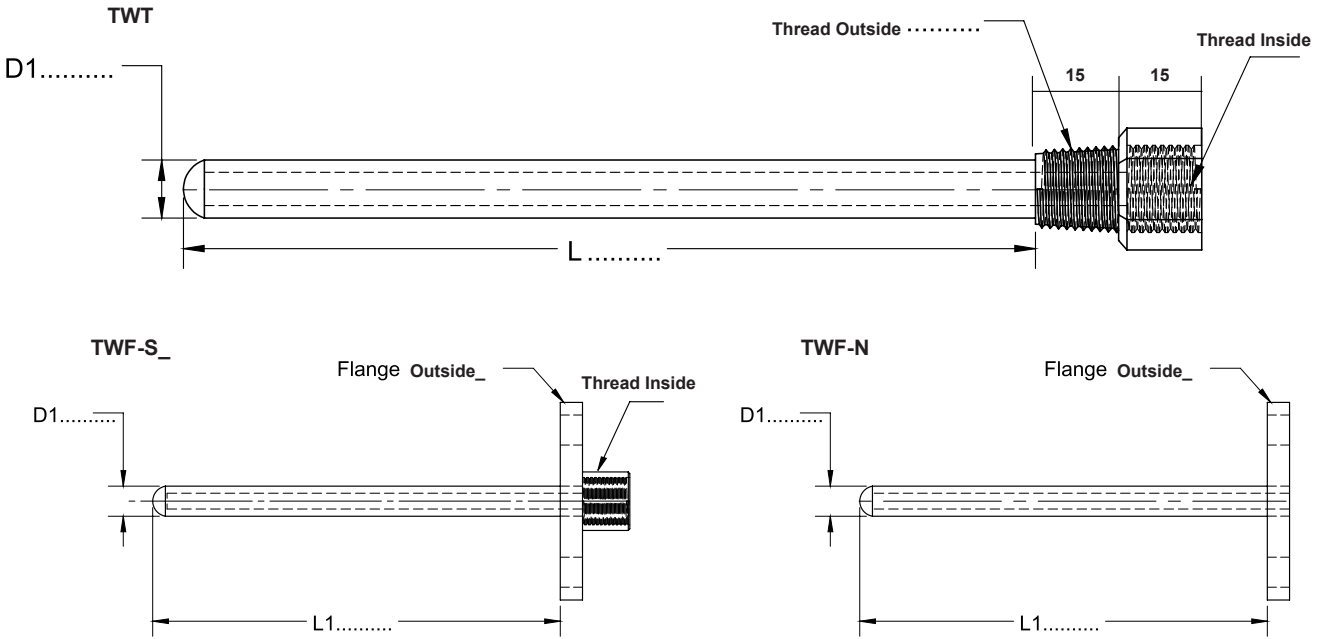

Installation Outside - Thread Inside - Thread/Flange Outside - Diameter Outside (D1) mm. X Length (L1) mm. - Material Tube

Thread Inside		Thread Outside			Diameter Outside (D1) mm.				Length (L1) mm.	
S2	1/4" NPT	Thread		for Diameter Outside (D1) mm.	Code	ขนาด	วัสดุ	Diameter of Temperature Sensor	100	100 mm.
S3	3/8" NPT	S2	1/4" NPT SUS304	6,8,9,5 mm.	6	6 mm.	SUS304,316	3,3,2 mm.	200	200 mm.
S4	1/2" NPT	S3	3/8" NPT SUS304	6,8,9,5, 12,7 mm.	8	8 mm.	SUS304,316	4,4,8,5 mm.	300	300 mm.
S6	3/4" NPT	S4	1/2" NPT SUS304	6,8,9,5,12,7, 15,8 mm.	9.5	9.5 mm.	SUS304,316	6 mm.	สามารถระบุความยาวได้ตามความต้องการ * ความยาวสูงสุด 1000 mm.	
N	None Thread	S6	3/4" NPT SUS304	6,8,9,5,12,7, 15,8,17,19 mm.	12.7	12.7 mm.	SUS304,316	6,3,5,8, 9,5 mm.		
Installation Outside		S8	1" NPT SUS304	6,8,9,5,12,7, 15,8,17,19 mm.	15.8	15.8 mm.	SUS304	10,2,12,7 mm.		
T	Thread	Flange Outside			17	17 mm.	SUS304	10,2, 12,7 mm.		
F	Flange	F1	1/2" JIS 10K SUS304		19	19 mm.	SUS304	15.8 mm.	Material Tube	
		F2	3/4" JIS 10K SUS304						None	SUS304
		F3	1" JIS 10K SUS304						A	SUS316
		F4	1 1/2" JIS 10K SUS304							