


## FP-108 C


6 Inch

162 x 150 x 55 mm

DIMENSION : mm

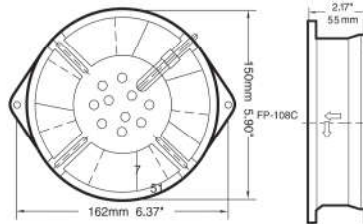

PERFORMANCE



## SPECIFICATIONS \*IP FOR AC SUPPLY: IP44


MODEL NO.	VOLT	FREQUENCY (Hz)	AIR (CFM)	VOLUME (M <sup>3</sup> /Min)	Current (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOICE (dBA)
FP-108C	100/120 VAC	50/60	210/250	5.9/7.0	0.5/0.45	38/35	2700/300	0.63/0.79	51/54
	220/240 VAC	50/60	210/250	5.9/7.0	0.5/0.45	46/40	2700/300	0.63/0.79	51/54

## FP-108 E


6 Inch

172 x 51 mm

DIMENSION : mm



PERFORMANCE

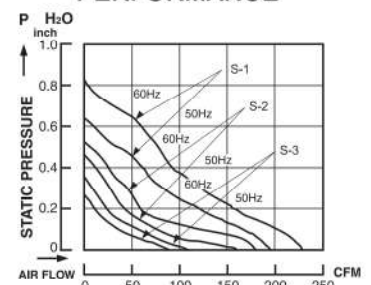

## SPECIFICATIONS \*IP FOR AC SUPPLY: IP44

MODEL NO.	VOLT	FREQUENCY (Hz)	AIR (CFM)	VOLUME (M <sup>3</sup> /Min)	Current (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOICE (dBA)
FP-108-E (S-1)	110/120 VAC	50/60	190/235	5.40/6.6	0.50/0.45	38/35	2800/3100	0.63/0.79	50/45
	220/240 VAC	50/60	190/235	5.40/6.6	0.29/0.25	35/21	2800/3100	0.63/0.79	50/45


## FP-108 EX

6 Inch


172 x 150 x 51 mm

MARS

DIMENSION : mm



PERFORMANCE

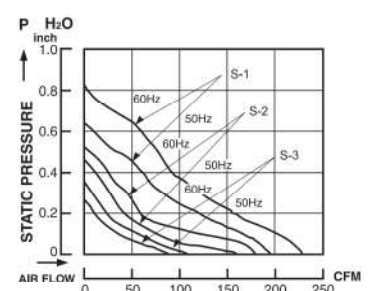

## SPECIFICATIONS \*IP FOR AC SUPPLY: IP44

MODEL NO.	VOLT	FREQUENCY (Hz)	AIR (CFM)	VOLUME (M <sup>3</sup> /Min)	Current (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOICE (dBA)
FP-108EX (S-1)	110/120 VAC	50/60	190/235	5.40/6.6	0.50/0.45	38/35	2800/3100	0.63/0.79	50/45
	220/240 VAC	50/60	190/235	5.40/6.6	0.29/0.25	35/21	2800/3100	0.63/0.79	50/45