


MVK Type Mini Terminals for MR 15 Rails


MVK 2,5

Width: 5 mm

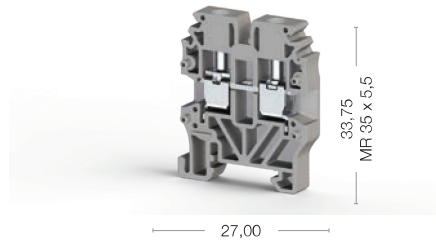

MVK 4

Width: 6 mm

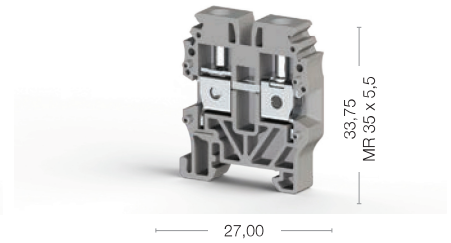

Cat No:

- 304 429
- 304 420

Cat No:

- 304 439
- 304 430



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL - CuLus
VDE (IEC 60947-7-1)
CSA
ATEX


Voltage, V ~	Current, A	Cross-Section
400	24	2,5 mm ²
300	20	AWG 26-12
400	23	

Voltage, V ~	Current, A	Cross-Section
400	32	4 mm ²
300	30	AWG 24-10
400	31,5	

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver


0,2-4 mm ²
0,2-4 mm ²
0,5-1,5 mm ²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKT 3 (0,6x3,5)

0,2-6 mm ²
0,2-6 mm ²
0,5-2,5 mm ²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKT 3 (0,6x3,5)

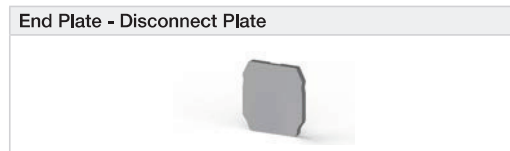

Type	Cat.No.	Qty.
NPP/MVK 2,5-4	444 429	100

Type	Cat.No.	Qty.
NPP/MVK 2,5-4	444 429	100

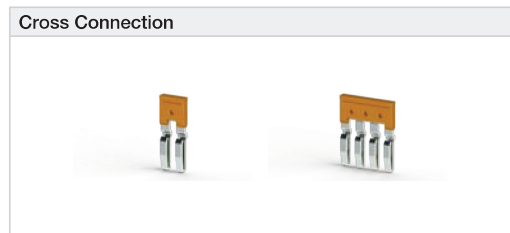

Type	Cat.No.	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5

Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15
UK 4/10	476 239	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)

6/3
1/B3
IP 20 / -
See pages 176-187 for usage of Dekafix

6/3
1/B4
IP 20 / -
See pages 176-187 for usage of Dekafix

Package Quantity
100 pcs.



100 pcs.

100 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8

MVK 2,5 T

Width: 5 mm

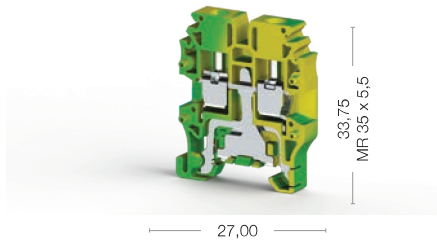



Cat No:

334 420

MVK 4 T

Width: 6 mm

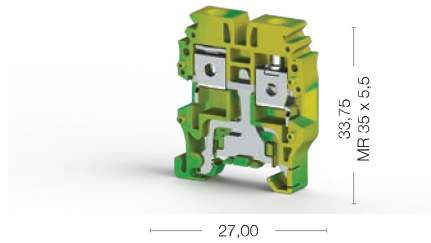

Cat No:

334 430

	Voltage, V ~	Current, A	Cross-Section		Voltage, V ~	Current, A	Cross-Section
			2,5 mm ²				4 mm ²
			AWG 26-12				AWG 24-10
	400				400		
		0,2-4 mm ²				0,2-6 mm ²	
		0,2-4 mm ²				0,2-6 mm ²	
		0,5-1,5 mm ²				0,5-2,5 mm ²	
		AWG 24-12				AWG 24-10	
		9-10 mm				9-10 mm	
		0,4-0,6 Nm				0,5-0,8 Nm	
		IKT 3 (0,6x3,5)				IKT 3 (0,6x3,5)	
Type	Cat.No.	Qty.		Type	Cat.No.	Qty.	
NPP/MVK 2,5T	444 422T	100		NPP/MVK 4T	444 422T	100	
	6/3				6/3		
	1/B3				1/B4		
	IP 20 / PE				IP 20 / PE		
	See pages 176-187 for usage of Dekafix				See pages 176-187 for usage of Dekafix		
		50 pcs.				50 pcs.	