


Practical Spring Clamp Terminals

PYK 1,5 M

Width: 4,2 mm

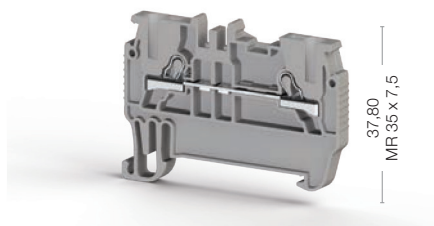


37,80
MR 35 x 7,5

52,00

PYK 2,5

Width: 5 mm

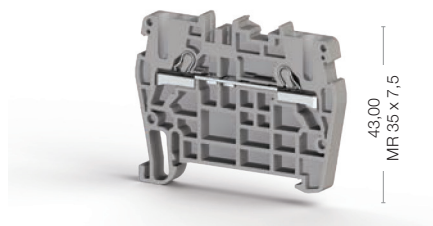

43,00
MR 35 x 7,5

53,40

Cat No:

307 019
307 010

Cat No:

307 109
307 100



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
800	17,5	1,5 mm ²

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm ²
600	20	AWG 22-12
800	24	2,5 mm ²
800	24	

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,34-2,5 mm ²
0,34-1,5 mm ²
0,5 mm ²
AWG 22-14
9-10 mm
KT 1 (0,4x2,5)

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KT 1 (0,4x2,5)



Type	Cat.No.	Qty.
NPP/PYK 1,5 M	446 639	100

Type	Cat.No.	Qty.
NPP PYK 2,5	446 449	100



Type	Cat.No.	Qty.
APP PYK 1,5 M	463 180	25

Type	Cat.No.	Qty.
APP/PYK 1,5-2,5-4	463 180	25



Type	Cat.No.	Qty.
UK 1,5/2	476 602	25
UK 1,5/3	476 603	20
UK 1,5/4	476 604	15
UK 1,5/10	476 609	5

Type	Cat.No.	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

8/3
1/A1-B1
IP 20 / -

8/3
1/A3
IP 20 / -

Marking Tags (Dekafix)

See pages 180-183 for usage of Dekafix
--

See pages 180-183 for usage of Dekafix
--

Package Quantity

100 pcs.

100 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8